



QUICK START UP

D14 RANGE 14 US GPM



*Congratulations on your new Dosatron.
Please read the following important information.*

IMPORTANT NOTES

For complete information on the features and operations, refer to your manual on www.dosatronusa.com or download our DOSATRON app



NEED HELP ? CALL 800-523-8499
www.dosatronusa.com

CUSTOMER SERVICE/DEPARTAMENTO CLIENTELA/ SERVICE CLIENTÈLE :

NORTH & CENTRAL AMERICA :
DOSATRON INTERNATIONAL INC.

2090 SUNNYDALE BLVD, CLEARWATER - FL 33765 - USA
Tel. 1-727-443-5404 / 1-800-523-8499 - Fax 1-727-447-0591
Site web: www.dosatronusa.com

MANUFACTURED BY/FABRICADO POR/FABRIQUÉ PAR :

DOSATRON INTERNATIONAL S.A.S. Certified GEH&S System
Rue Pascal - B.P. 6 - 33370 TRESSÈS (BORDEAUX) - FRANCE
Tel. 33 (0)5 57 97 11 11
Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85
info@dosatron.com - www.dosatron.com



This document does not form a contractual engagement on the part of Dosatron International and is for information only. Dosatron International reserves the right to alter product specification or appearance without prior notice.

© DOSATRON INTERNATIONAL S.A.S 2009

ET268/Warning-D14-US/1/15

⚠ CAUTION

- When connecting a DOSATRON either to the public water supply or to its own water source, you must respect the regulations in force concerning protection of the source i.e. backflow prevention, etc.
- Contact local authorities for requirements of backflow prevention.
- When installing, operating, and maintaining the DOSATRON water powered metering pump, keep safety considerations foremost. Use proper tools, protective clothings, and eye protection when working on the equipment and install the equipment with a view toward ensuring safe operation.
- Follow the instructions in the manual and take additional safety measures appropriate to the liquid being pumped and the temperature of the water that powers the DOSATRON. Be extremely careful in the presence of hazardous substances (e.g. corrosives, toxins, solvents, acids, caustic, flammables, etc.).
- Before applying any aggressive chemicals, please consult your distributor to confirm compatibility with the dosing pump.

Hand tighten. No tools needed.

RECOMMENDATIONS

DO NOT USE THIS UNIT WITHOUT A 300 MESH [60 MICRON] WATER FILTER* OR YOUR WARRANTY WILL BE VOID.

*The 300 mesh [60 micron] water filter (sold separately) protects your unit from debris in the water that causes scoring to the piston and housing.

**KNOW YOUR WATER FLOW!
GRADUALLY TURN ON THE WATER.**

**COUNT THE NUMBER OF CLICKS IN
15 SECONDS. DO NOT EXCEED 48* CLICKS.**


CLICK CHART

Clicks/15sec	GPM	Clicks	US GPM
2	0.6	16	4,5
4	1,2	32	9
8	2,3	48	14

MAXIMUM PRESSION 85 PSI* [6 bar]


* 57psi [4 bar] D14MZ520

1

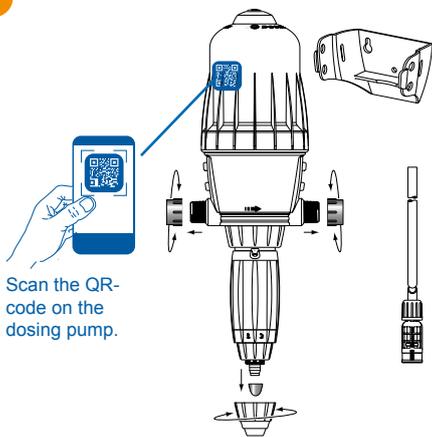


Scan the QR-code on the dosing pump.

2

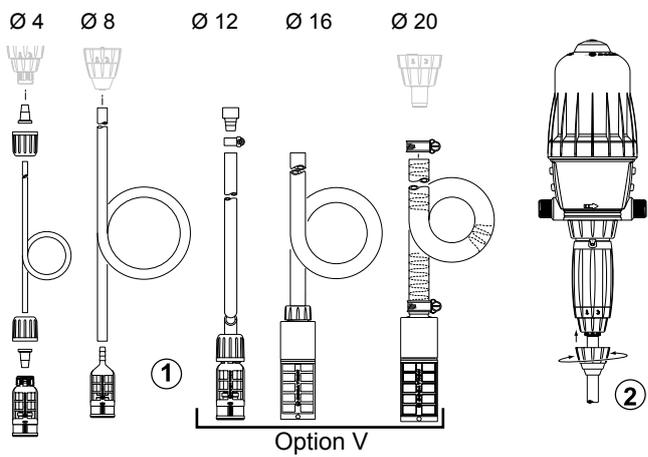


Option V

3

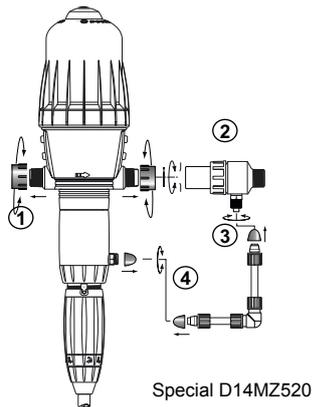

Special D14MZ520


4

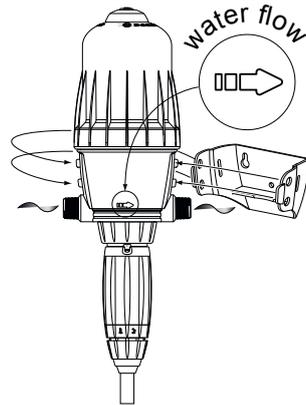

Maximum: 48 clicks/15 sec.*


*D14MZ520 = 30 clicks/15 sec.

5

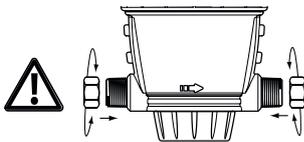


Max. Torque 20 Nm thus 2 kg (1 N.m = 0,1 DaN.m)

INSTALLATION HINTS

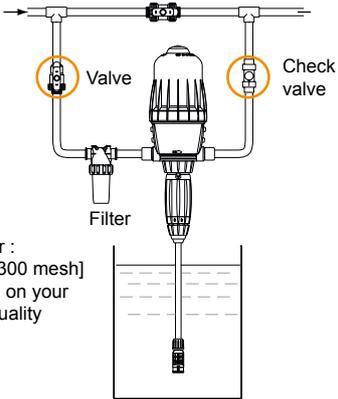


Filter :
60 microns [300 mesh]
Depending on your
water quality

6

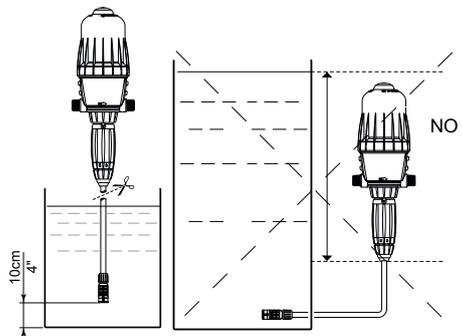


7

When possible,
DO NOT PLACE
the container directly
under
the DOSATRON

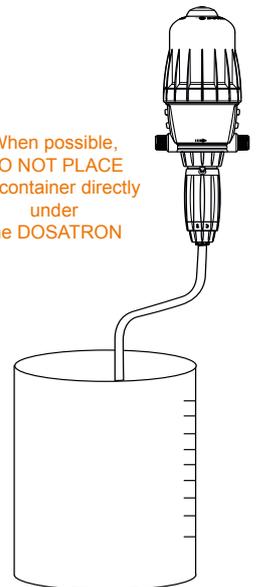


8

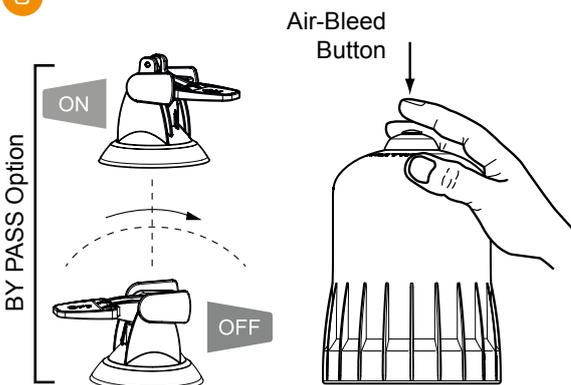

Air-Bleed
Button

BY PASS Option

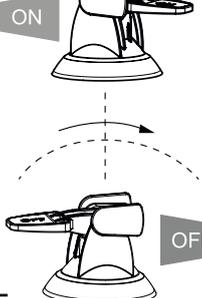

9

